

TIMES TURN

54" x 65½" QUILT — DESIGNED BY RACHEL SHELBURNE



PIONEER SPIRIT FABRIC COLLECTION BY TOM BROWNING FOR MAYWOOD STUDIO

MAYWOOD  STUDIO

Panel Rows

1. Trim the panel to 28½" x 40½".



2. Cut the panel into two rows 10½" x 40½".



3. Sew 2" x 10½" Fabric 5 strips to the sides of both panels. Press toward the strips. The rows should measure 10½" x 43½".



Making the Blocks

4. Take two light Fabric 2 triangles and two dark Fabric 9 triangles. Sew the light and dark triangles together in pairs, with the light triangle on top. Press toward the dark triangle.



5. Sew the matching Step 1 pairs together (careful, as you are sewing a bias edge!). Twist the center to open the seam allowance so they spin around the center. Press. Trim "dog-ears".



6. Repeat Steps 1 and 2 using light Fabrics 2-4 and dark Fabrics 7-11 to make a variety of blocks. You should have 42 blocks that measure 4½" square.

Piecing the Block Rows

Hint: You can piece the quilt as shown or before making the rows you can arrange the blocks to suit yourself.


7. Sew a 2" x 4½" Fabric 5 strip to the right side of a block turned **light side up**. Press toward the block.




8. Sew a block turned **dark side up** to the Step 7 unit. Press toward the sashing.



9. Continue alternating Fabric 5 strips and blocks to make a row of 7 blocks. Press the seams toward the strips. Set aside row 1. Repeat for rows 3 and 5, for a total of three rows.

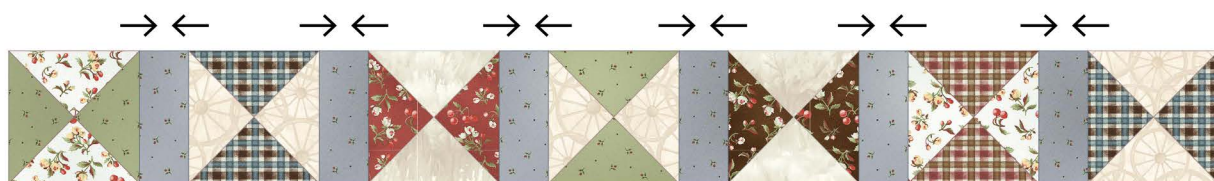


10. To make row 2, follow Steps 7 - 9, starting instead with a block turned **dark side up**. Press toward the strips. Repeat for rows 4 and 6, for a total of three rows.

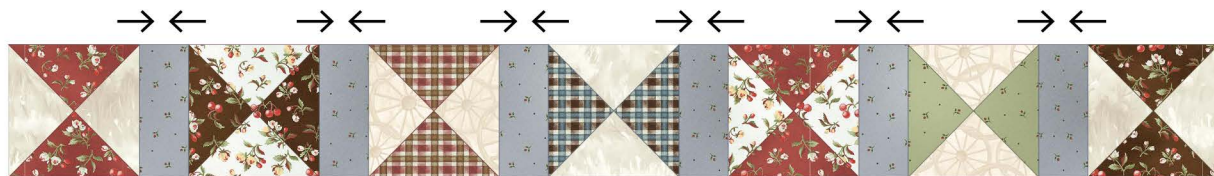

Assembling the Quilt

11. Starting with row 1, pin and sew a 2" x 37½" Fabric 5 strip to the bottom of the row. Press toward the sashing strip.

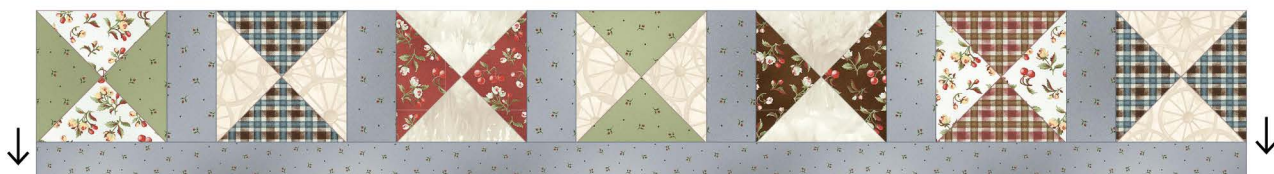

12. Pin and sew row 2 to the bottom of a Step 11 unit. Press toward the sashing strip.



13. Pin and sew the 1½" x 37½" Fabric 5 strips to the top and bottom of the Step 12 unit. Press toward the sashing.



14. Pin and sew a 3½" x 12" Fabric 5 strips to each side of the Step 13 unit. Press toward the sashing. At this point your block row unit should measure 12" x 43½".



15. Repeat Steps 11-14 for rows 3 and 4. Repeat again for rows 5 and 6.

16. Starting with a block row unit and alternating with panel rows, pin and sew the rows together. Press seams toward sashing/block rows.

Borders

Non-Mitered Borders:

Piece, then trim two Fabric 2 borders the width of the quilt. Sew to the top and bottom of the quilt. Press toward borders. Measure the sides of the quilt, then piece and trim two borders to match that length. Sew to the sides of the quilt and press toward borders.

Repeat the process for the Fabric 6 borders.

For mitered borders, add six inches to the ends of each border. General mitered border instructions are available free at www.maywoodstudio.com/projects/#section-tips












Finishing the Quilt

1. Layer the backing, the batting and the quilt top. Baste, then quilt as desired. Before binding, hand-baste a scant ¼" from the edge of the quilt to hold the layers together.

2. Prepare the binding strips by joining with diagonal seams pressed open. Fold the binding in half, wrong sides together and press to make a double binding.



3. Sew the binding to the quilt with a ⅜" seam, mitering the corners. Trim the excess batting and backing and turn the binding to the back side. Stitch down by hand with matching thread.

FABRIC		CUTTING	FABRIC		CUTTING
	Fabric 1 MAS8172-Z 1 panel (or 1 yd)	Fussy cut two panel rows measuring 10½" x 40½". (See instructions, Step 1.)		Fabric 7 MAS8179-R ¼ yd	From each of Fabrics 7 through 11, cut: 2 — 2½" x WOF strips, into: 17 — Companion Angle triangles OR... 1 — 5¼" x WOF strip, into: 5 — 5¼" squares cut twice on the diagonal
	Fabric 2 MAS8175-E ¾ yd	From only Fabric 2, cut: 6 — 2" x WOF strips for borders LIGHT FABRICS From each of		Fabric 8 MAS8179-B ¼ yd	
	Fabric 3 MAS8176-E ¼ yd	Fabrics 2 through 4, cut: 3 — 2½" x WOF strips, into: 28 — Companion Angle triangles OR...		Fabric 9 MAS8178-A ¼ yd	
	Fabric 4 MAS8178-W ¼ yd	1 — 5¼" x WOF strips, into: 7 — 5¼" squares cut twice on the diagonal		Fabric 10 MAS8178-R ¼ yd	
	Fabric 5 MAS8180-B 1½ yd	8 — 2" x WOF strips, into: 36 — 2" x 4½" pieces 4 — 2" x 10½" pieces 3 — 2" x 37½" pieces 2 — 3½" x WOF strips, into: 6 — 3½" x 12" pieces 6 — 1½" x WOF strips, into: 6 — 1½" x 37½" strips BINDING 7 — 2½" x WOF strips		Fabric 11 MAS8180-G ¼ yd	
	Fabric 6 MAS8178-B 1 yd	6 — 4½" x WOF strips for borders (For mitered corners, cut 7 strips.)		Backing 3½ yds	Suggested Tool Tri-Recs™ EZ Quilting #8823753A 